


ACTIVE POWER TRANSDUCER (WATT)

MODEL : DW SERIES

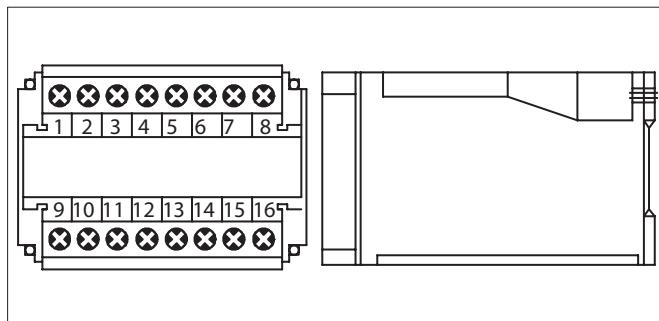

■ FEATURES

- Accuracy $\pm 0.2\%$ RO.
- 3 element are packaged in one case
- Excellent long term stability (4~20mA, 750 Ω)
- Precision measurement even for unbalance system
- Precision measurement even for distorted wave
- Measuring reverse watt is available
- High impulse & surge protection (5KV)
- The case can be mounted on a 35mm rail which complies with DIN 46277


■ DESCRIPTION

Model : DW-1 for 1Φ 2w, active power(watt)


DW-3 for 3Φ 3w, active power(watt)

DW-3A for 3Φ 4w, active power(watt)

A wide range of transducers to measure all forms of active power, in both balanced and unbalanced, single or 3 phase system. They utilize the well prove "time division multiplication" method of measuring instantaneous power over a wide range of input waveforms. The circuit diagram shown measured voltage is modulated by circuit of an oscillator. Square wave pulses from a multi-vibrator circuit, with a mark-space ratio varied by the measured voltage and amplitude by the measured current, are fed to an integrator an output amplification circuit. The dc signal produced is then directly proportional to power input-Watts.

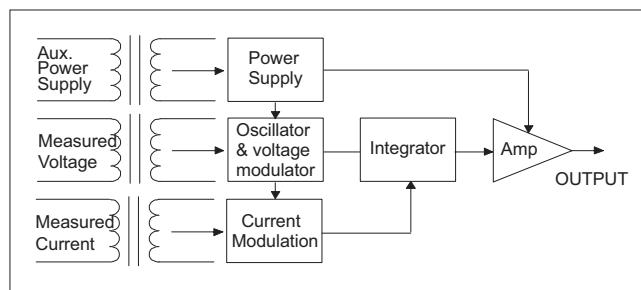

• INPUT-OUTPUT CURVE

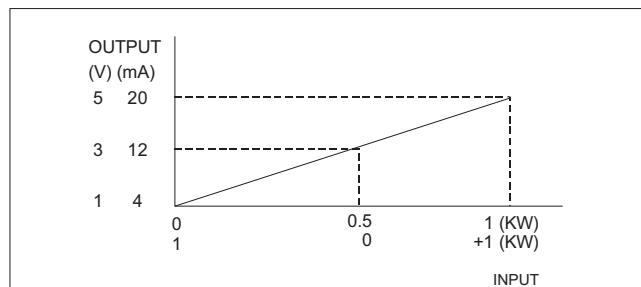

• OUTPUT

DC output Range	Load Resistance	Output Resistance	Output Ripple	Response Time
0 ~ 1V	$\geq 500\Omega$			
0 ~ 5V	$\geq 500\Omega$	$\leq 0.05\Omega$		
1 ~ 5V	$\geq 500\Omega$			
0 ~ 10V	$\geq 500\Omega$			
0 ~ 1mA	$0 \sim 15K\Omega$	$\geq 20M\Omega$		
0 ~ 10mA	$0 \sim 1500\Omega$			
0 ~ 20mA	$0 \sim 750\Omega$			
4 ~ 20mA	$0 \sim 750\Omega$	$\geq 5M\Omega$		

Accuracy : $\pm 0.2\%$ Rated of Output

Input frequency : $50Hz \pm 3Hz$ or $60Hz \pm 3Hz$

Input burden : $\geq 0.1VA$ (ampere input)

$\leq 0.2VA$ (ampere input)

Aux. Power supply : AC $110V \pm 15\%$, 50/60Hz

AC $220V \pm 15\%$, 50/60Hz

DC $24V$, $48V$, $110V$, $+15\%$, -10%

$\leq 0.1\%$ RO

Power effect : $\leq 4VA$, $\leq DC 3W$

Power consumption : $\leq 0.2\%$ RO, at distortion factor 15%

Waveform effect : current output $\leq 0.1\%$ RO.

Output load effect : voltage output $\leq 0.05\%$ RO.

Electromagnetic balance effect : $\leq 0.1\%$ RO

Mutual interference effect : $\leq 0.1\%$ RO. between element

Magnetic field strength : $400A/M$. $\leq 0.2\%$ RO..

Span adjustment range : $\geq 5\%$ RO

Zero adjustment range : $\geq 1\%$ RO

Operating temperature range : $0 \sim 60^\circ C$

Storage temperature range : $-10 \sim 70^\circ C$

Temperature coefficient : $\leq 100PPM$ from 0 to $60^\circ C$

Max. relative humidity : 95%

Isolation : Input/output/power/case

$\geq 100M\Omega$, DC $500V$

Between input/output/power/case

AC $3KV$, $60Hz$, 1min

5KV, $1.2 \times 50\mu s$

Common mode & differential mode

Designed to comply with IEC688

IEC 414, BS5458

■ SPECIFICATION


• INPUT

Input Range			Max. Input Over Capability
Circuit	Amp.	Voltage	Basic Watt
Single Phase	5A	110V(120V)	$0 \sim 0.5KW$
		220V(240V)	$0 \sim 1KW$
3-Phase 3-wire	5A	110V(120V)	$0 \sim 1KW$
		220V(240V)	$0 \sim 2KW$
3-Phase 4-wire	5A	190/110V (208/120V)	$0 \sim 1.5KW$
		380/220V (416/240V)	$0 \sim 3KW$


ACTIVE POWER TRANSDUCER (WATT)

MODEL : DW SERIES


■ ORDERING MODEL MAKE UP

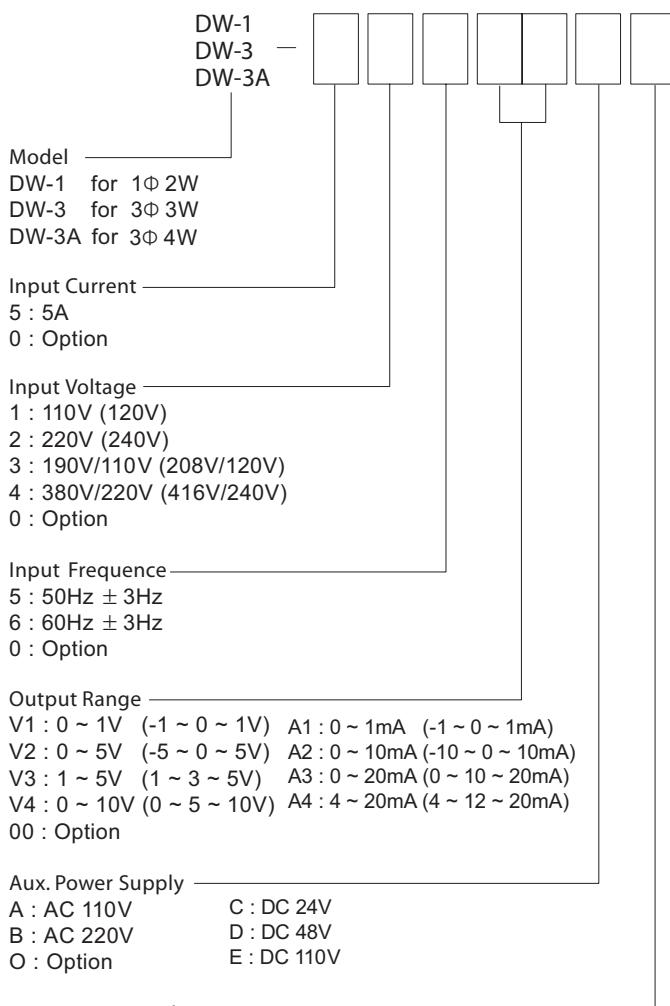

■ THE OUTSIDE DIMENSION

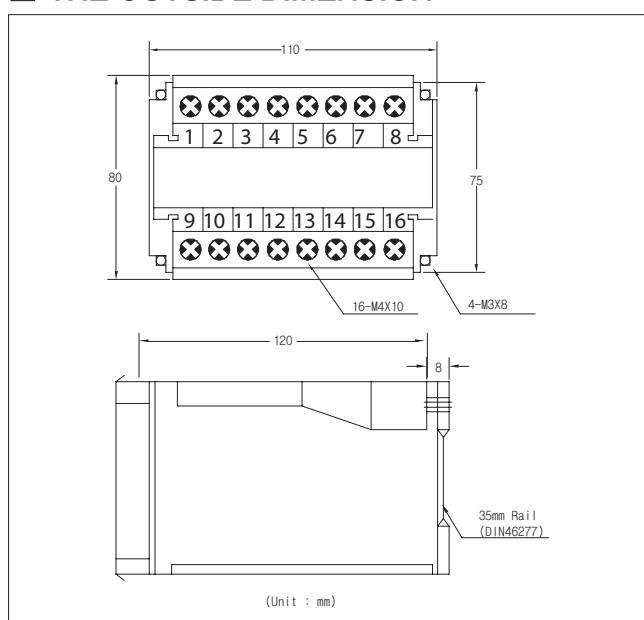


■ PANEL MOUNTING HOLES

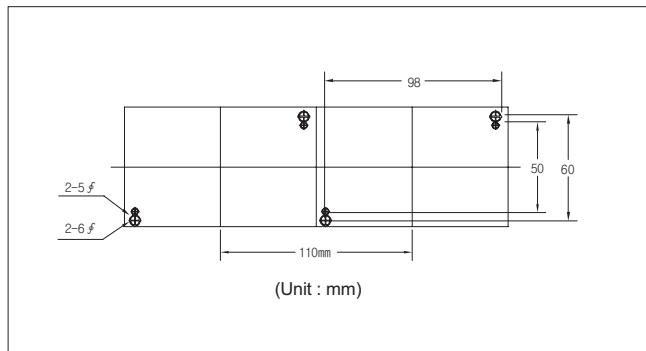


■ CONNECTION DIAGRAM

DW-1 (1Φ 2W)

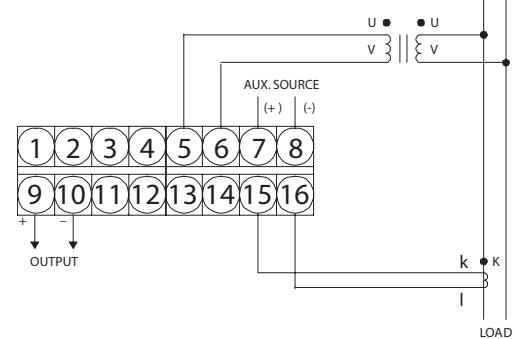

DW-3 (3Φ 3W)

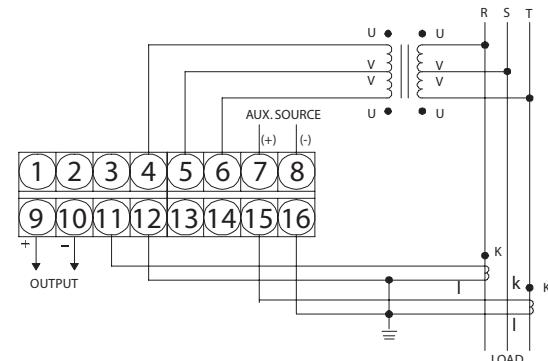

DW-3A (3Φ 4W)

